

TEST CERTIFICATE

489 1002 78A

Tests according to EN 489:2009
for
joint casing system

„Polyethylene shrink joint with shrink sleeve
type WSD Superseal“

by order of

Canusa Systems Limited
in **West Sussex RH109QT, England**

Test Specimen No. 2775, 2776, 2777:

Joints


2x DN 80/PE160 and 1x DN 150/PE250

FFI-report 923E_4905:

The soil stress tests were carried out according to the European Standard EN 489:2009 at the FFI in January / February 2010: Sandbox test according to EN 489:2009 and water impermeability test according to EN 489:2009.

There was no water ingress.


The soil stress tests were successful.

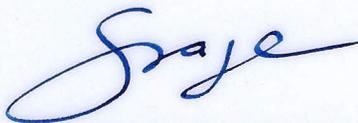

Dipl.-Ing. Thomas Grage
Managing director

Hemmingen, 24.02.2010

FERNWÄRME-FORSCHUNGSINSTITUT
IN HANNOVER E.V.
Tel. 05 11/9 43 70-0 · Fax - 70
30966 Hemmingen · Max-von-Laue-Str. 23



Dipl.-Ing.(FH) Volker Herbst
Project manager