

PRODUCT INFORMATION



KEBUTYL- SYSTEM C 50-C

Two-tape system

Corrosion protection system in accordance with DIN EN 12068 and
DIN 30 672

Load class C, max. operating temperature 50°C

DIN-DVGW-Registration No. NV-5180AU0469



PRODUCT INFORMATION

GENERAL

Kebutyl-System C50-C is a cold-applied two-tape corrosion protection system. It is used for coating steel pipelines, fittings or welded joints of factory coated pipelines the coatings of which are mentioned by DIN EN 10329, table 2.

Testo-Tape 1.2 H (inner layer) is self-amalgamating in the overlap area into a homogenous layer, forming a continuous tubing. High plasticity and sufficient thickness of the material provides a coating free of voids.

Kebulen-Tape PE 0.5 (outer layer) is constructed asymmetrically. In overlap areas the wrappings melt together with each other as well as with the underlying **Testo-Tape 1.2 H**. Total thickness of the system adds up to about 3.4 mm.

Kebutyl-System C50-C provides reliable corrosion protection due to its excellent workability and its low permeability to water vapour and oxygen.



STRUCTURE

Kebutyl-Primer Kill

Solvent based coupling agent
Dissolution made of butyl rubber and unsaponifiable resins in organic solvent


Consumption: about 0.2 l/m²
Drying time: about 3 – 5 minutes

Testo®-Tape 1.2 H

Corrosion protection tape based on butyl rubber with polyethylene carrier film

Kebulen-Tape PE 0.50

Double-sided asymmetrical polyethylene foil coated with butyl rubber

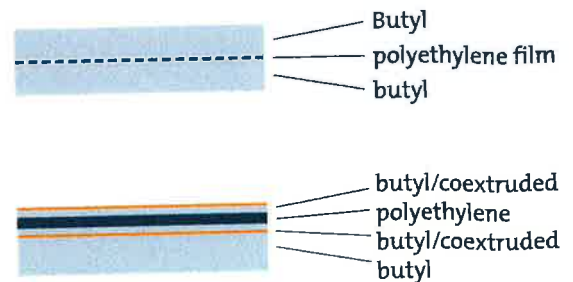

KEBUTYL-SYSTEM C 50-C



PACKAGE

Kebutyl-Primer Kill	Consumption/m ²	Package	
	about 0.2 ltr.	about 1 / 5 / 10 ltr.	
	Length/roll	rolls/carton	width
Testo^o-Tape 1.2 H	10 m	9	30 mm
Thickness: 1.2 mm	10 m	6	50 mm
Butyl rubber tape with foil liner	10 m	3	100 mm
Kebulen-Tape PE 0.50			
Thickness: 0.5 mm	20 m	9	30 mm
black, yellow, blue	20 m	6	50 mm
Double-sided asymmetrical	20 m	3	100 mm
polyethylene foil coated with butyl rubber			

Other length and width upon request.

APPLICATION

The area to be coated must be dry, if necessary dry it with a propane burner. **Kebutyl-System C50-C** does not require any preheating. Wire-brush the steel substrate thoroughly to remove rust, dirt, residuals of ultrasonic inspection coupling agent as well as temporary end and edge protection.

On steel pipes with a three-layer factory polyethylene coating, the layers of epoxy resin and bonding adhesive on the pipe surface may also be covered by the field coating. To ensure high peel strength roughen the epoxy resin or adhesive using a manual wire brush. Remove any traces of oil and grease using suitable solvent.

When coating bare steel pipes take special care to ensure that no mill scale is present on the pipe surface. Any mill scale must be blasted to Sa 2.5 in accordance with DIN EN ISO 12944-4.

The edges of polyethylene factory coatings are normally bevelled. Take care to ensure that no voids are formed. Where voids may form, as in the case of straight edges, damage and reinforced factory coatings, prepare the edges using suitable tools. Semi-circular rasps have proved to be suitable for this purpose. When working on coating edges take care to prevent damage such as notches and cuts in the factory polyethylene coating.

Clean about 100 mm of the factory coating adjacent to the cutback area and roughen it manually using a wire brush.

Apply **Kebutyl-Primer K III** all over the area to be coated using a paint brush or a paint roller. Drying time takes 3 – 5 minutes, depending on the weather.

Apply **Testo-Tape 1,2 H** beginning and ending with a full circumferential wrap on about 50 mm of the factory coating. Proceed with 50 % overlapping, ensuring to work crease-free.

When coating pipelines with diameters > DN 900 the thrust forces that can be achieved are low. To ensure that butyl rubber moves into those areas likely to build voids apply a three-ply tape of max. 50 mm cylindrically with high tensile strength (overstretching the tape) before wrapping **Kebulen-Tape PE 0.5**.

Apply **Kebulen-Tape PE 0.5** like the first layer, beginning and ending with a full circumferential wrap and proceeding spirally with 50 % overlapping. The tape must completely cover the **Testo-Tape** applied before. An overlap of 25 mm is recommended.



CONSUMPTION TABLE

The table is valid for coating a field joint with a steel surface of 300 mm and 50 mm of a adjacent factory coating on both ends (inner layer). The outer layer overlaps the inner layer by 25 mm on both ends.

DN	Diametre Ø	Kebutyl Primer K III	Testo [®] -Tape 1,2 H 50% overlapping width		Kebulen-Tape PE 0,50 50% overlapping width	
			100 mm	0.55 m ²	100 mm	0.62 m ²
200	219.1 mm	0.062ltr.	100 mm	0.55 m ²	100 mm	0.62 m ²
250	273.0 mm	0.077 ltr.	100 mm	0.69 m ²	100 mm	0.77 m ²
300	323.9 mm	0.092ltr.	100 mm	0.81 m ²	100 mm	0.92 m ²
350	355.6 mm	0.100 ltr.	100 mm	0.90 m ²	100 mm	1.00 m ²
400	406.4 mm	0.115 ltr.	100 mm	1.02 m ²	100 mm	1.15 m ²
	419.0 mm	0.118 ltr.	100 mm	1.05 m ²	100 mm	1.19 m ²
500	508.0 mm	0.144 ltr.	100 mm	1.28 m ²	100 mm	1.44 m ²
	521.0 mm	0.147 ltr.	100 mm	1.31 m ²	100 mm	1.47 m ²
600	609.6 mm	0.172 ltr.	100 mm	1.53 m ²	100 mm	1.73 m ²
700	711.2 mm	0.201 ltr.	100 mm	1.79 m ²	100 mm	2.01 m ²
800	812.8 mm	0.230 ltr.	100 mm	2.05 m ²	100 mm	2.30 m ²
900	914.4 mm	0.258 ltr.	100 mm	2.30 m ²	100 mm	2.59 m ²
1000	1016.0 mm	0.287 ltr.	100 mm	2.56 m ²	100 mm	2.87 m ²

All quantities are based on calculations.

kebu is certified to be in conformance with DIN EN ISO 9001.

We are member of DVGW, KRV and GKR and supply state-of-the-art products only. All products are subject to constant supervision of external institutes.

Product quality and customer satisfaction are paramount in our policy. We work for you and with you to find tailor-made solutions and accompany you throughout the process.

Our product range includes:

- Kebulen tapes and systems
- Petrolatum tapes and masses
- Bituminous tapes
- Kebulen shrinkable sleeves
- Kebulen shrinkable tubular sleeves
- Kebulen patches C 50
- Shrinkable materials for muff joints
- Synthetic resins:
 - Unsaturated polyester resin
 - Unsaturated vinyl ester resin
- Kebudur HT 80- System
 - Butyl rubber combined with
 - GRP (glassfibre reinforced plastic)

Visit our website at www.kebu.de and find out more about us and our products.

The information given in this publication is based on our knowledge and experience. The hints and instructions for use given therein have been compiled to the best of our knowledge on the basis of our tests and experience. Best results will be obtained if our products are used in a proper and expert way. Any protected rights and existing laws and regulations must be complied with by the recipient of our products under own responsibility. In all other respects our general terms and conditions shall apply.



ABDICHTUNG ROHRSCHUTZ STRASSENTECHNIK

Kebulin-Gesellschaft Kettler GmbH & Co. KG Fabrik für Korrosionsschutz und Abdichtung seit 1933

Ostring 9 · D-45701 Herten-Westerholt · Postf. 6180 · D-45684 Herten
Telefon +49 209 9615-0 · Fax +49 209 9615-190
Internet: www.kebu.de · E-Mail: info@kebu.de

Ke bu Rohrschutz- und Abdichtungsgesellschaft mbH

Kamenzer Straße 6 · D-01896 Pulsnitz
Telefon +49 35955 44900 · Fax +49 35955 45953
www.kebu-pulsnitz.de · info@kebu-pulsnitz.de