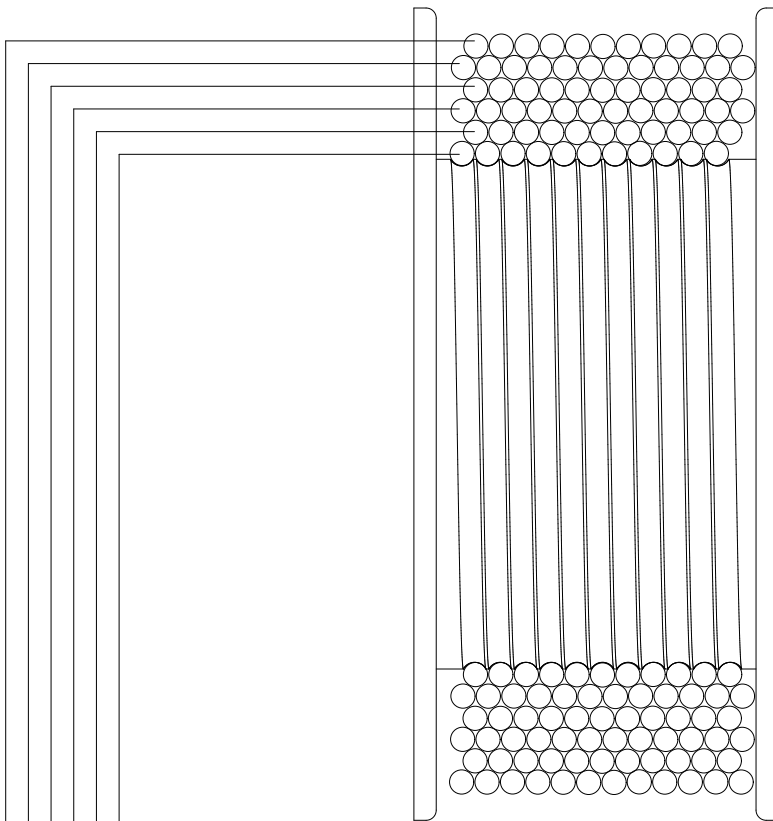





Subject to change, production tolerances have to be taken into account.



Strands		
1STRAN		
		
	Load capacity	
	Wire reception	
1	3500 kg [7,720 lb]	13,1 m [43'0"]
2	3260 kg [7,190 lb]	26,2 m [85'11"]
3	3050 kg [6,720 lb]	41,2 m [135'2"]
4	2870 kg [6,330 lb]	56,1 m [184'1"]
5	2705 kg [5,960 lb]	73,1 m [239'10"]
6	2560 kg [5,640 lb]	89,8 m [294'7"]

Strands		
2STRAN		
		
	Load capacity	
	Wire reception	
1	7000 kg [15,430 lb]	13,1 m [43'0"]
2	6520 kg [14,370 lb]	26,2 m [85'11"]
3	6100 kg [13,450 lb]	41,2 m [135'2"]
4	5740 kg [12,650 lb]	56,1 m [184'1"]
5	5410 kg [11,930 lb]	73,1 m [239'10"]
6	5120 kg [11,290 lb]	89,8 m [294'7"]

Strands		
4STRAN		
		
	Load capacity	
	Wire reception	
1	14000 kg [30,860 lb]	13,1 m [43'0"]
2	13040 kg [28,750 lb]	26,2 m [85'11"]
3	12200 kg [26,900 lb]	41,2 m [135'2"]
4	11480 kg [25,310 lb]	56,1 m [184'1"]
5	10820 kg [23,850 lb]	73,1 m [239'10"]
6	10240 kg [22,570 lb]	89,8 m [294'7"]

Weights of load handling devices are part of the load lifted and must be deducted from the capacity.
Weight of the load handling equipment must be deducted from the lifting capacity.