

DESCRIPTION

- High luminosity, SMD LED technology for indoor installation.
- Hours and minutes display.
- Fixed or alternate time with date or week number display or temperature (integrated probe).
- Height of digits 10 cm, optimal viewing distance: 40 metres.
- Angle of vision: 120°.
- Led colours: red, green, yellow, blue and white.
- Models: independent, impulse, wireless (FI+DCF), wireless DHF, AFNOR and NTP.



NORMS

- Norm NF EN50081-1: generic emission standard.
- Norm NF EN50082-1: generic immunity standard.
- Norm NF EN60950: safety of information technology equipment.

GENERAL FEATURES

- **Adjustable brightness**..... 4 levels.
- **Display mode**..... 12 or 24 hour.
- **Eco mode**..... Programmable energy saving over a time period.
- **Time change**..... Automatic summer/winter time changeover and perpetual calendar.
- **Time base backup**.....
 - Independent model: 15 days in case of power failure.
 - Impulse model: data saving and impulses reception without battery in case of power outage.
 - Synchronised models: at each start the clocks wait for the synchronisation signal.
- **Time accuracy**..... 0.2 second/day (except NTP model: precision dependent on the time server).
- **Operation**..... silent.
- **Digit made**..... 7 segments with 5 LEDs each.
- **Hours and minutes separating**..... colon made of LEDs.
- **Configuration**..... 2 capacitive buttons.
- **NTP model**.....
 - Synchronisation unicast, multicast and by DHCP.
 - Advanced configuration from the embedded web server.



See the product page
>> www.bodet-time.com <<

MECHANICAL FEATURES

- **Construction**..... PC/ABS black (IP30, IK02) and PPMA Poly(methyl methacrylate) cristal.
- **Operating temperature range**..... -5 to +55°C.
- **Weight**..... 1.8 Kg.

ELECTRICAL FEATURES

- **Power supply**.....
 - Independent, impulse, AFNOR and wireless DHF models: 100-240VAC ± 10%, 50/60Hz.
 - Wireless (FI+DCF) model: 230VAC ± 10%, 50/60Hz.
 - NTP model: PoE (Power over Ethernet) – class 0.
- **Consumption max**..... 5 W.
- **Electric protection (except NTP model)**..... class 2.

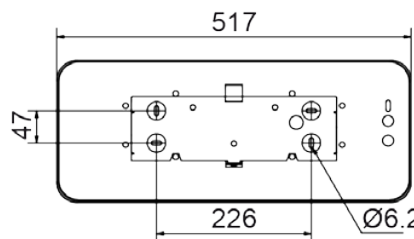

STYLE 10 REFERENCES

- 946 71x..... Independent model
- 946 72x..... Impulse model
- 946 73x..... France Inter + DCF model
- 946 74x..... DHF model
- 946 75x..... AFNOR model
- 946 77x..... NTP model
- Specify the Led colour by replacing the "x" in the reference number by: 1: red - 2: green - 3: yellow - 4: blue - 5: white

- 946 005..... Mounting on hanging bracket
- 946 006..... Wall mounting

