

TECHNICAL SPECIFICATIONS



Dimensions: 54 - 56 cm seat centres
51.5 cm depth
95 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a varnished solid wood covering.
Polyurethane density 55 Kg/m³

Seat: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring.
Polyurethane density 65 Kg/m³

Side panel: Extrusion blow moulded in texturized high-density polyethylene, 60mm
Wooden end row panels.


Concealed floor fixation system.

Armrest: Optionally in wood.


Volume: 0.17 m³ / unit

Weight: 21.00 Kg not assembled

DRAWING

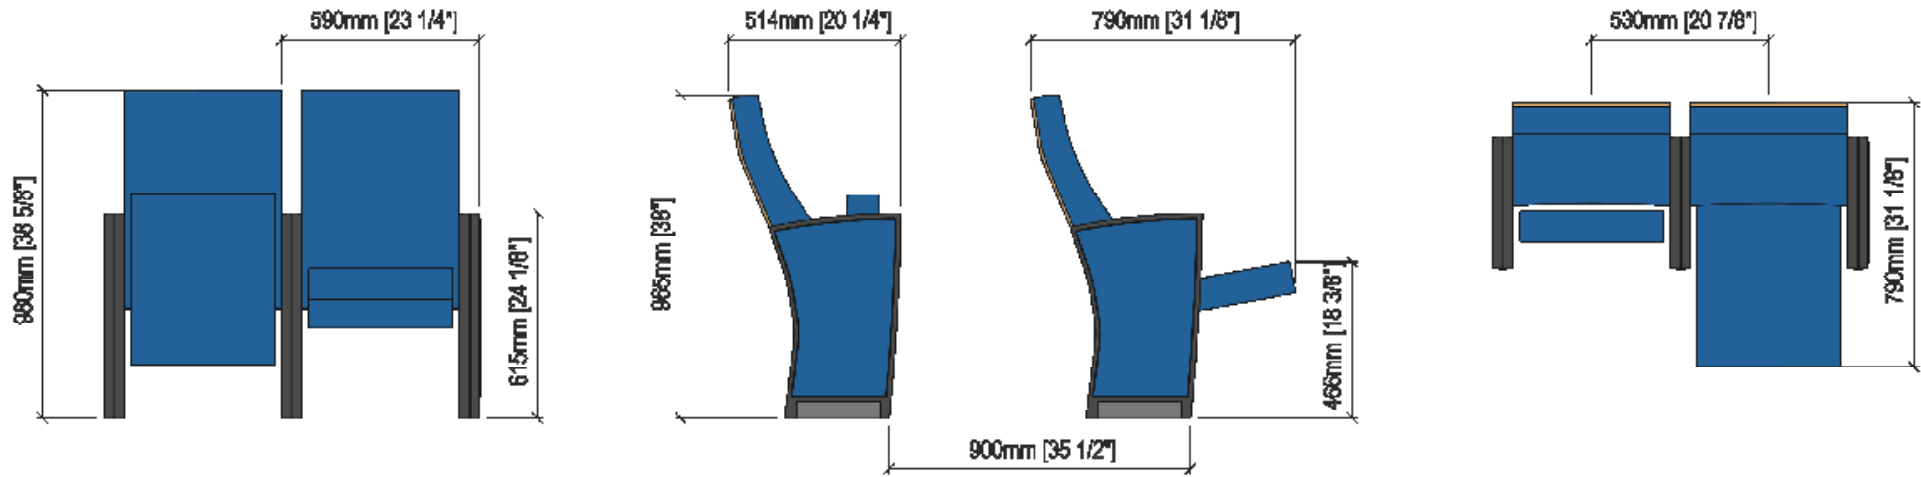

OPTIONS

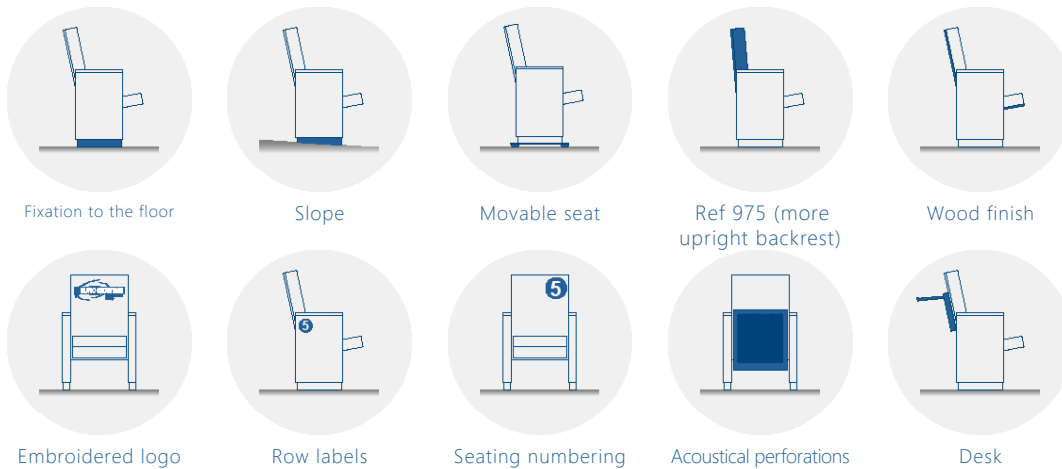

CERTIFICATES

- BS 5852:2006
- BS-EN 1021-1:2006
- CAL TB 117-2013, SECTION 1
- UNE 23.727-90 1R (M1)
- UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
- BS 5852:1979 Parte 1

	Fabric	Fire Barrier	Foam
BS 5852:2006	●		
BS-EN 1021-1:2006	●		
CAL TB 117-2013, SECTION 1	●		
UNE 23.727-90 1R (M1)	●	●	
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	●	●	●
BS 5852:1979 Parte 1		●	

