Extremely small-sized cylinder bed!





WT169 Series

270mm

Variable top feed, interlock stitch machines with an extremely small-sized cylinder bed

W(T)600 Series

WT169 Series

Variable top feed, interlock stitch machines with an extremely small-sized cylinder bed (circumference:113 mm)

W(T)200 Series 177mm

- Thanks to this cylinder bed, the sewing of small-sized tubular goods, such as sleeve openings and bottoms of wear for children and babies, which would otherwise be difficult, is easy.
 This feature increases the quality of sewn products.
- Equipped with the belt type bottom feed mechanism and a top feed dog, these machines sew cross seam sections smoothly, so that no plyshifting and/or twisting occurs on the fabric during sewing. Neatly finished products are obtained.



WT169 Series

Subclasses


WT169-03


for Covering

WT169-08

for Hemming

Photo: WT169-03Fx356BT/UT4C

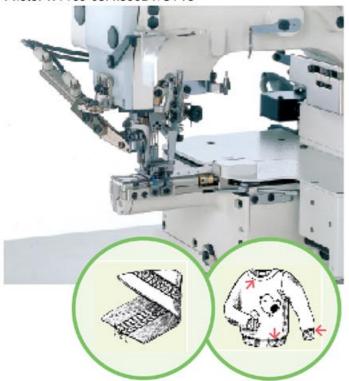

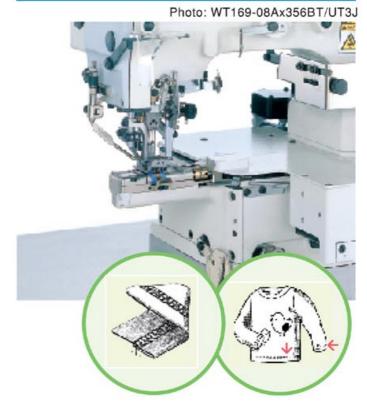

Common specifications

*1 Subclasses	Į	۵	- mm	*2 Type of needle plate	₩ mm	mm ₩₩	<u>+</u>	()	*3 Option
WT169-03F	3	5	5.6	ВТ	0.8-3.3	1-5	4.5	4,000	Underbed thread trimmer (UT3J/ UT4C)
WT169-03G				BS					
WT169-08A	2	4	4	ВТ					
			4.8	ВТ					
	3	5	5.6	BT/BS					
			6.4	BS					

- *1 -03F: For covering (flatting out overlock seam) / -03G: For covering (folding over overlock seam) -08A: For hemming
- *2 BT: For standard stitch length (1.8 to 2.3mm) and forms a <u>soft</u> seam (enough looper thread come out). BS: For standard stitch length (1.8 to 2.3mm) and forms a <u>tight</u> seam.
- *3 Please see the following type of UT device. UT3J: Pneumatic underbed thread trimmer, needle thread wiper, presser foor lift UT4C: Pneumatic underbed thread trimmer, top cover thread trimmer, presser foor lift Note: Details of the specifications vary according to each subclass and sewing conditions.





PEGASUS SEWING MACHINE MFG.CO.,LTD.

5-7-2 Sagisu, Fukushima-ku, Osaka 553-0002, Japan TEL:81-6-6458-4739 TEL:81-6-6454-8785 URL http://www.pegasus.co.jp

